

RYNO[®] BENCH → FLOOR FASTENING



These instructions apply only when fixing to a concrete floor with no obstructions (e.g. under floor heating, cables, plumbing, etc.). When fixing to any other surface, or with obstructions, please contact your Pineapple representative for further advice

REQUIRED ITEMS

- 1x High power Drill
- 1x Floor fixing bracket (provided)
- 1x long 4.5mm Drill bit (provided)
- 4x long security screws (provided)
- 1x 4.5mm metal drill bit (provided)
- 4x appropriate floor fixing bolts
- Cutting Fluid

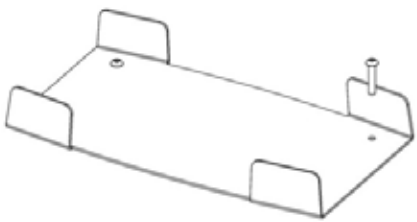
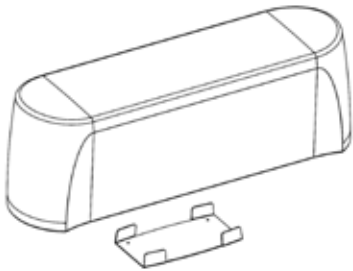
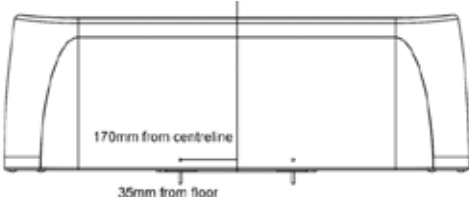


+44 (0)1622 237830

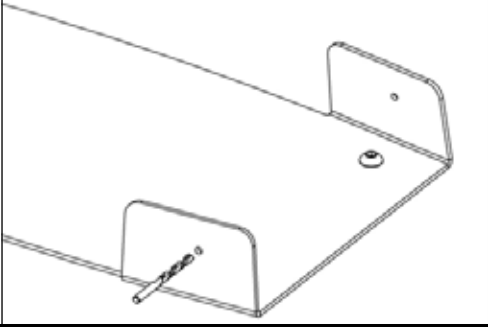

sales@pineapplecontracts.com

Pineapple

RYNO[®] BENCH → FLOOR FASTENING

<h2>01</h2>	<p>Place metal bracket on the floor with the bench over the top and position to where needed</p>	
	<p>Remove bench and affix bracket to the floor using the correct hardware</p>	<h2>02</h2>
<h2>03</h2>	<p>Place bench over the bracket</p>	
	<p>Mark two points 35mm from the floor and 170mm from the centreline of each bench. Mark the points on both sides</p>	<h2>04</h2>

RYNO[®] BENCH → FLOOR FASTENING

<h2>05</h2>	<p>With the bench in place drill through all 4 points until a hole is started in the metal floor fixing plate. Use the long 4.5mm Drill provided. (Use cutting fluid and the drill at a low speed)</p>	
	<p>Remove the bench and drill through the remainder of the steel plate using the shorter 4.5mm drill bit. (Use cutting fluid and the drill at a low speed)</p>	<h2>06</h2>
<h2>07</h2>	<p>Place the bench back over the bracket and align all the holes</p>	
	<p>Use the provided long security screws in each of the 4 holes Ensuring the heads end up flush with the side of the bench</p>	<h2>08</h2>



+44 (0)1622 237830

sales@pineapplecontracts.com

Pineapple

DISCLAIMER

- Ensure the proper and adequate hardware is used to secure furniture
- Ensure fastenings are appropriate for the anchoring material
- Use fastenings of an appropriate strength and consider using security fixings in challenging environments
- Consider using high strength thread-locker on fastenings in challenging environments
- Ensure all gaps are sealed with the appropriate anti-pick mastic after product installation if necessary
- Please read all instructions carefully to ensure proper installation. Failure to read and follow instructions may result in inadequate product installation and void of warranty
- Pineapple shall not be held liable for any consequences caused by the improper installation of products to the installer or the end user



+44 (0)1622 237830

sales@pineapplecontracts.com

Pineapple