





KEY FEATURES

- Furniture is recessed into the wall to prevent damage and minimise ligature risks
- Products are to be secured to a timber frame within the wall for strength
- Reduces the risk of concealment/stashing
- Single piece construction is impervious to water - cannot be damaged by fluids
- Preserves line of sight for staff conducting welfare checks
- Creates a room with uncluttered floor space
- Safely rounded corners



MATERIAL/FABRICATION

Rotationally moulded, durable polyethylene, one-piece construction provides excellent strength and stability. Flamed, textured finish further strengthens the fire-retardant, water-resistant, UV-stabilised shell. Anti-microbial material gives high chemical resistance (e.g. ammonia, sodium hydroxide) throughout the product. Item is fully recyclable as polyethylene can be melted down to create a whole new product.

TEST STANDARDS

- ANSI/BIFMA X5.9 Storage Units
- Fire retardant to CAL 133 and UL 94 HB, Crib 5, DIN 66084
- Antibacterial Activity MOD ISO 22196: 2011
- Ryno ISO 11925 (2020)

DELIVERY

[core colours] leadtime 5 weeks | [non-core colours] will have longer leadtimes and additional costs

OPTIONS

- Other products available in the Ryno Recessed range
- Lime Green (LG) and Vegas Yellow (VY) colours have a minimum order quantity of 12 units
- Available with Wardrobe (with storage/ hanging space)

1RRYOWH
1880H | 698W | 510D (mm)
29kg



COLOUR/FINISH

CORE COLOURS

Moonwalk Grey Dusty Blue Cool Green

Granite Epic Blue Icon Purple

Thunder Grey Dusty Pink

Sand Teal

Warm Terracotta Violet Purple

Lime Green Vegas Yellow

these colours have a minimum order quantity of 12 units

NON-CORE COLOURS

RYNO® RECESSED MODULAR

ASSEMBLY

Arrives assembled and ready to be installed/fitted on-site.

INSTALLATION/FITTING

Wall installation solution - We recommend fitting to be completed by our skilled installation team. For more information and detailed installation instructions please refer to our '**Ryno Recessed - User Guide**'. Please be mindful that incorrect fitting methods, may cause an unsafe environment and void your warranty.

MAINTENANCE

Avoid using abrasive materials or cleaning agents, solvents, steam cleaning or jet washing. Use bleach and chlorine disinfectant with caution and avoid placing in close proximity to sources of heat. Read more on our website.

WARRANTY

Lifetime guarantee against all manufacturing faults.

DISCLAIMER

Extreme temperature changes (e.g. a cold night followed by a warm sunny day) may cause air inside the product to expand, causing short-term changes to its shape

Due to the nature of the rotational moulding process, flat surfaces on Ryno® products may feature slight undulations which do not detract from the product's strength or durability.

T

+44 (0)1622 237830

E

sales@pineapplecontracts.com

W

uk.pineapplecontracts.com



Pineapple

RYNO[®] RECESSED MODULAR

1RRYOWS

1805H | 457W | 533D (mm)

Standard weight: 19kg

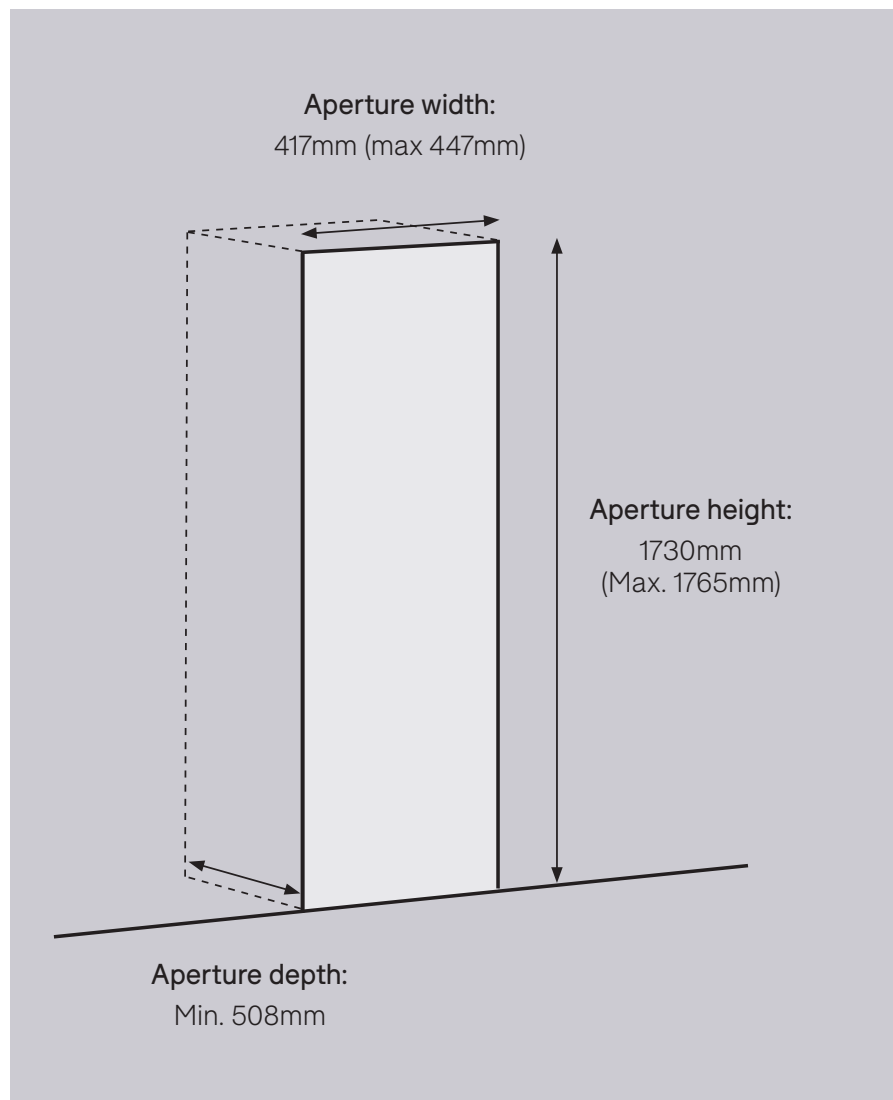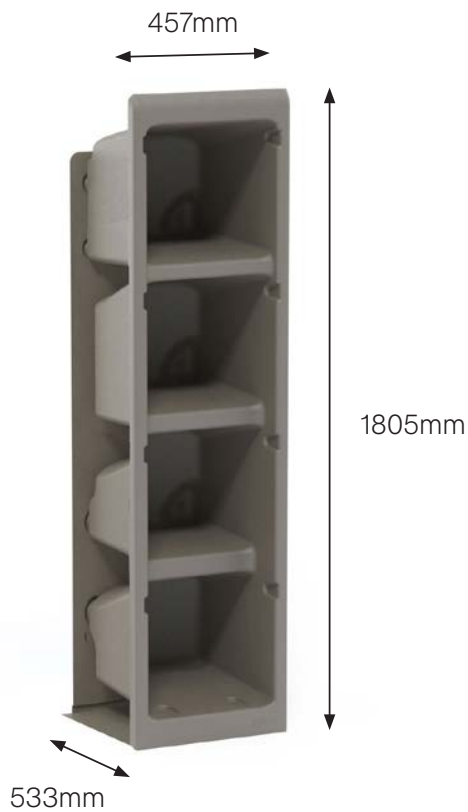

T

+44 (0)1622 237830

E

sales@pineapplecontracts.com

W

uk.pineapplecontracts.com

Pineapple