


RYNO[®] BLOSSOM BENCH

→ FLOOR FIXING INSTRUCTIONS

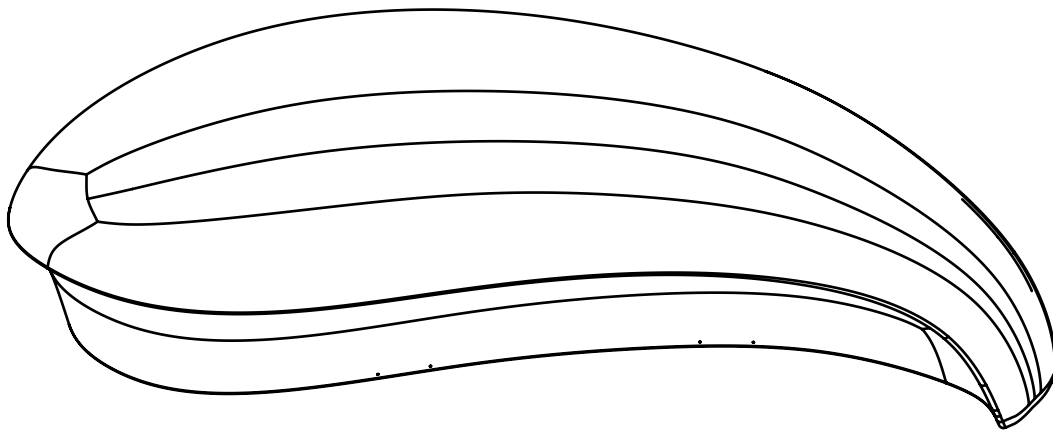

WARNING: *Read this document prior to installation.*

Version 1

Release date: 08/10/2026




+44 (0)1622 237830


sales@pineapplecontracts.com

Pineapple


KIT OF PARTS (SUPPLIED)



→ 4 x Floor fixing
brackets




→ 1 x long drill bit




→ 8 x long security
screws


REQUIRED EQUIPMENT (NOT SUPPLIED)




→ Marking device
not supplied




→ TX25 tamperproof
drill bit
not supplied



→ Cordless drill
not supplied




→ Appropriate floor
fixing hardware
not supplied



→ Masking tape
not supplied

FLOOR FIXING LAYOUT GUIDE

→ A4 templates available to print can be found on pages 8-11.

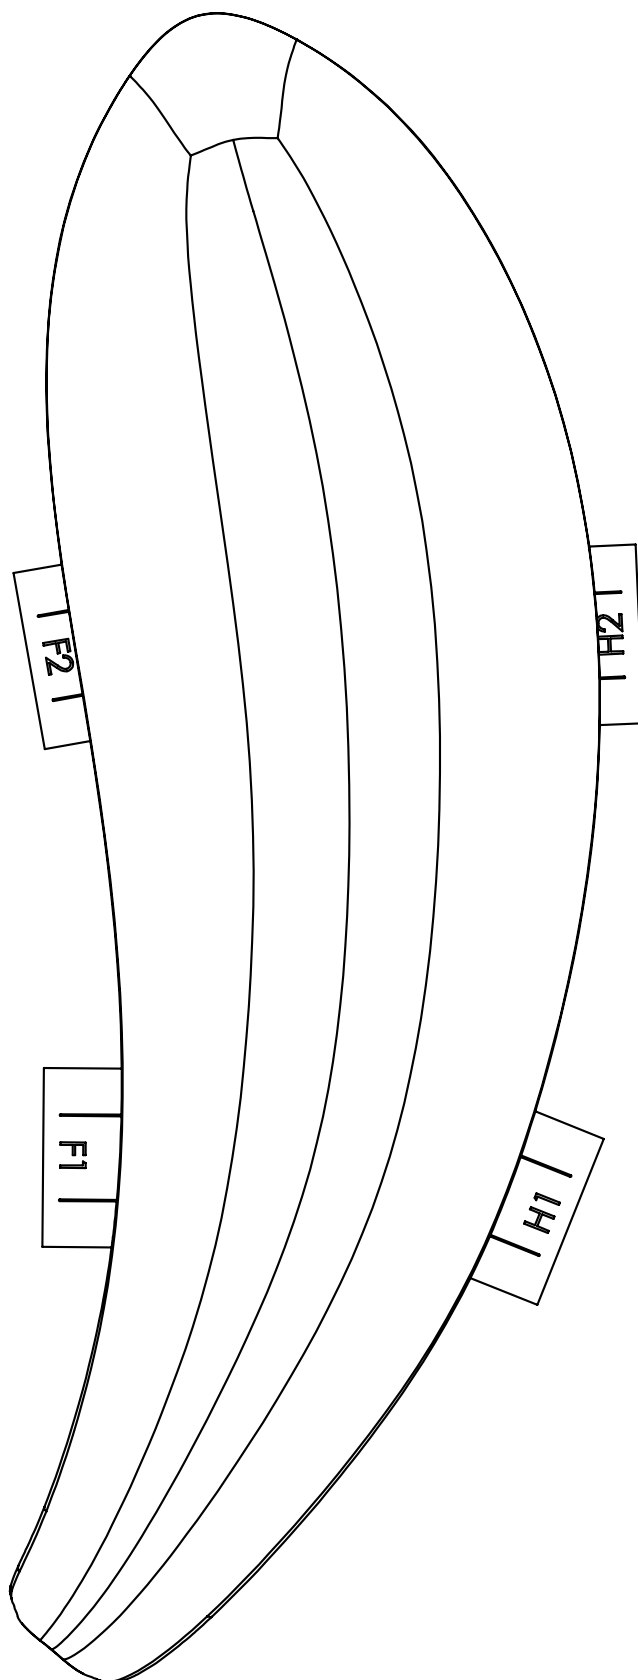


RYNO BLOSSOM BENCH → FLOOR FIXING INSTRUCTIONS

01


- Place the product in the desired location and place the four templates under the bench in their corresponding locations.

Align the two straight lines on each template with the two drill points on the side of the product (see *layout guide on page 3*).

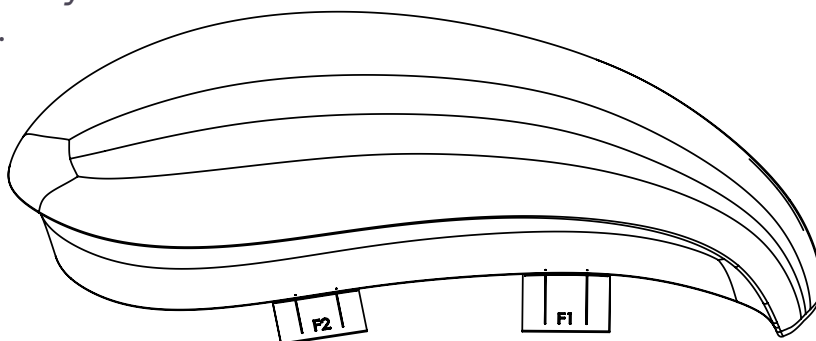

02


- Tape down the templates and remove the bench - we recommend at least 2 people to help move the bench.

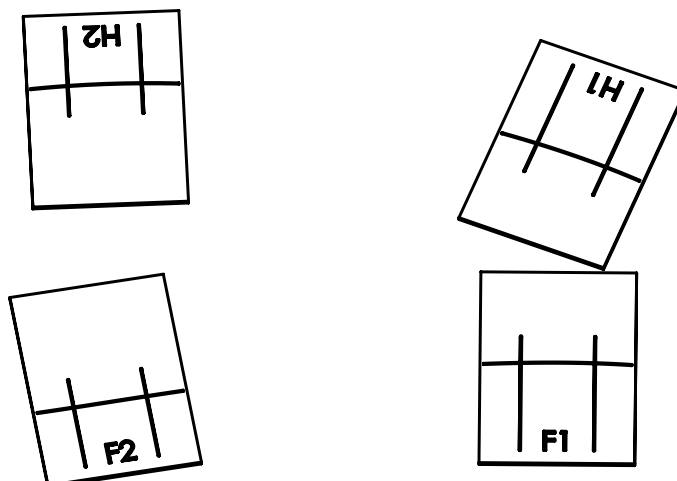

RYNO BLOSSOM BENCH → FLOOR FIXING INSTRUCTIONS

03

- Mark the x16 fixing points on the ground and drill through them using an appropriate drill bit.

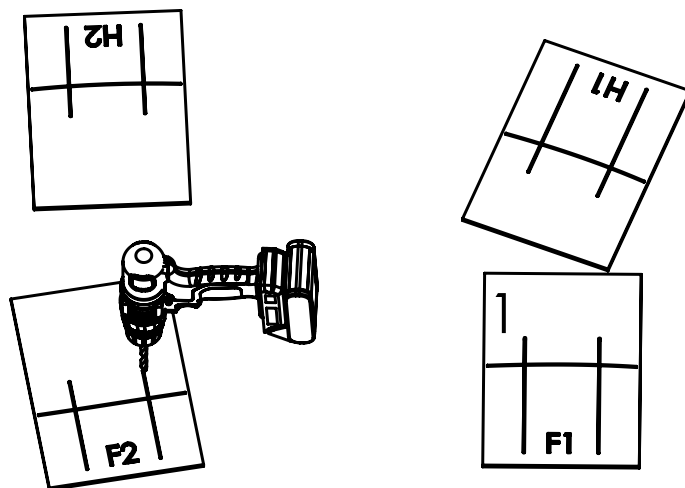

04


- Remove the templates and place the floor fixing brackets over the drilled holes.



RYNO BLOSSOM BENCH → FLOOR FIXING INSTRUCTIONS


05

- Using suitable floor fixing hardware secure the brackets to the ground.

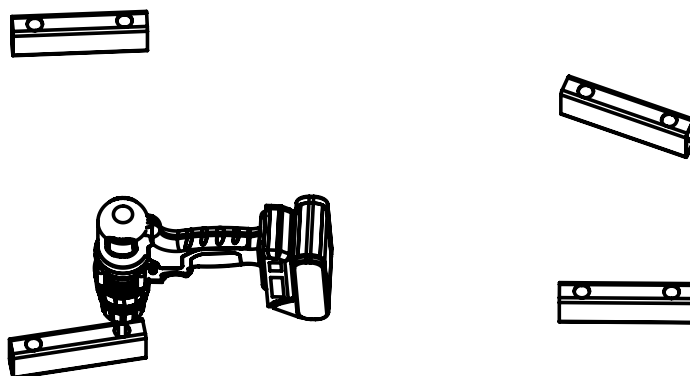

06


- Place the bench back over the brackets and ensure it sits flush to the ground.

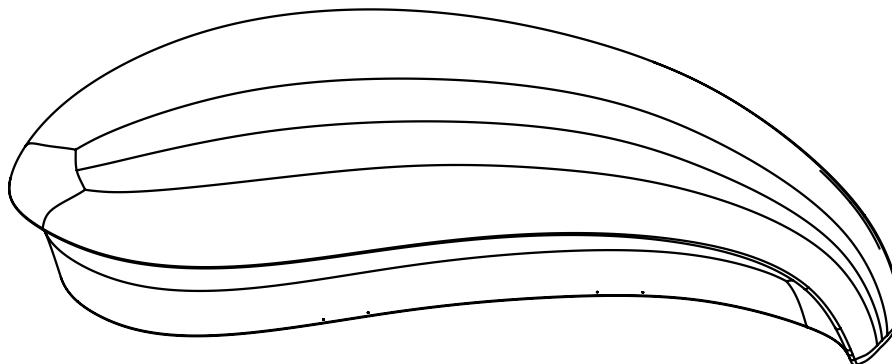

RYNO BLOSSOM BENCH → FLOOR FIXING INSTRUCTIONS


07


- Using the long drill bit - drill through the drill points on the side of the bench. Ensure you drill through both sides of the floor fixing bracket. Make sure the product doesn't move after these holes have been drilled.

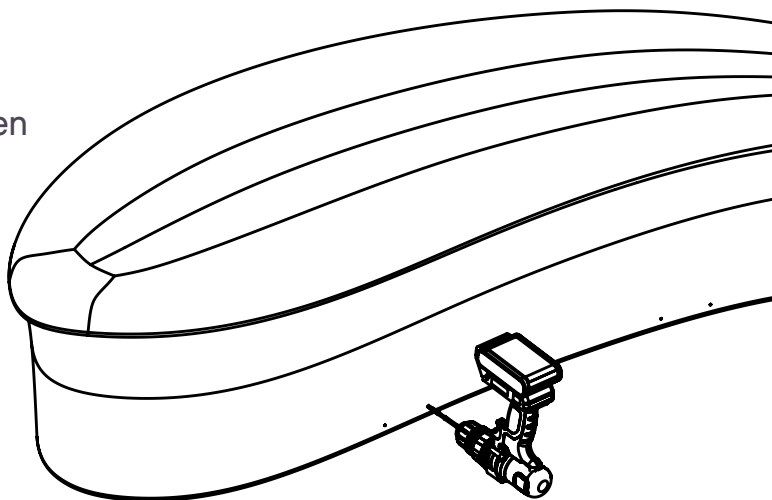


08

- Drive the long security screws through the hole, ensure that they sit flush or just below the surface of the product.

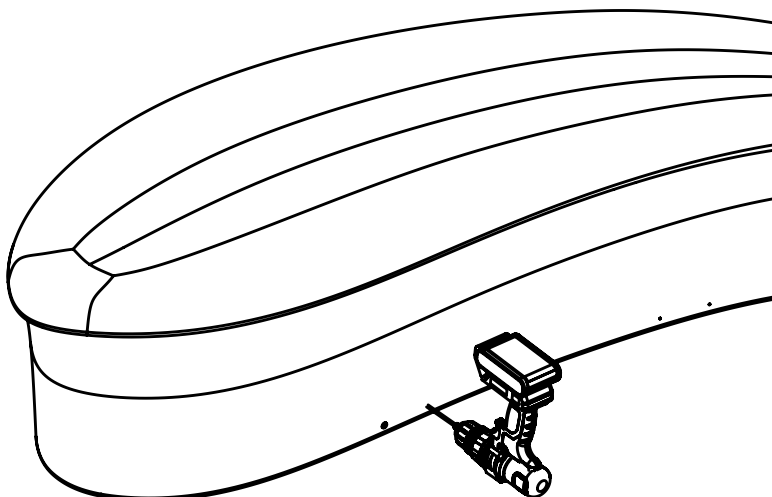

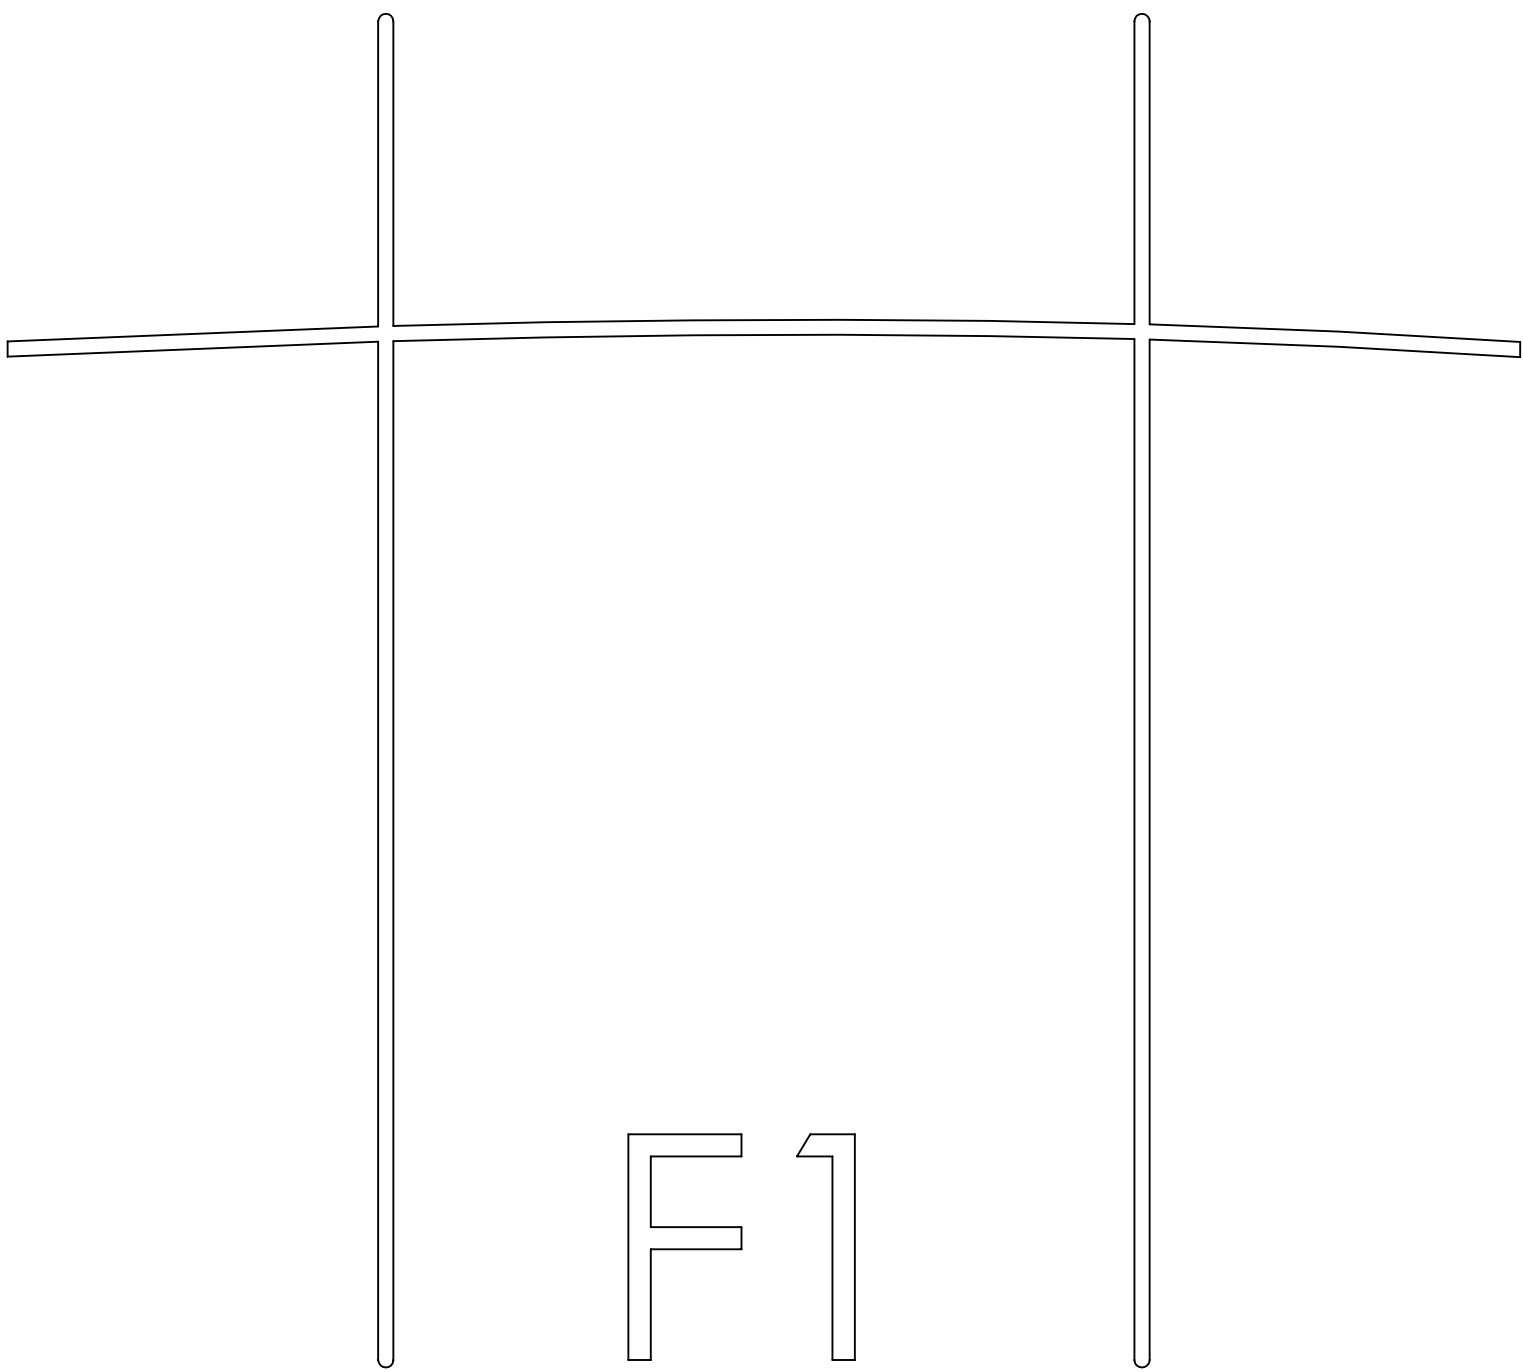

F2

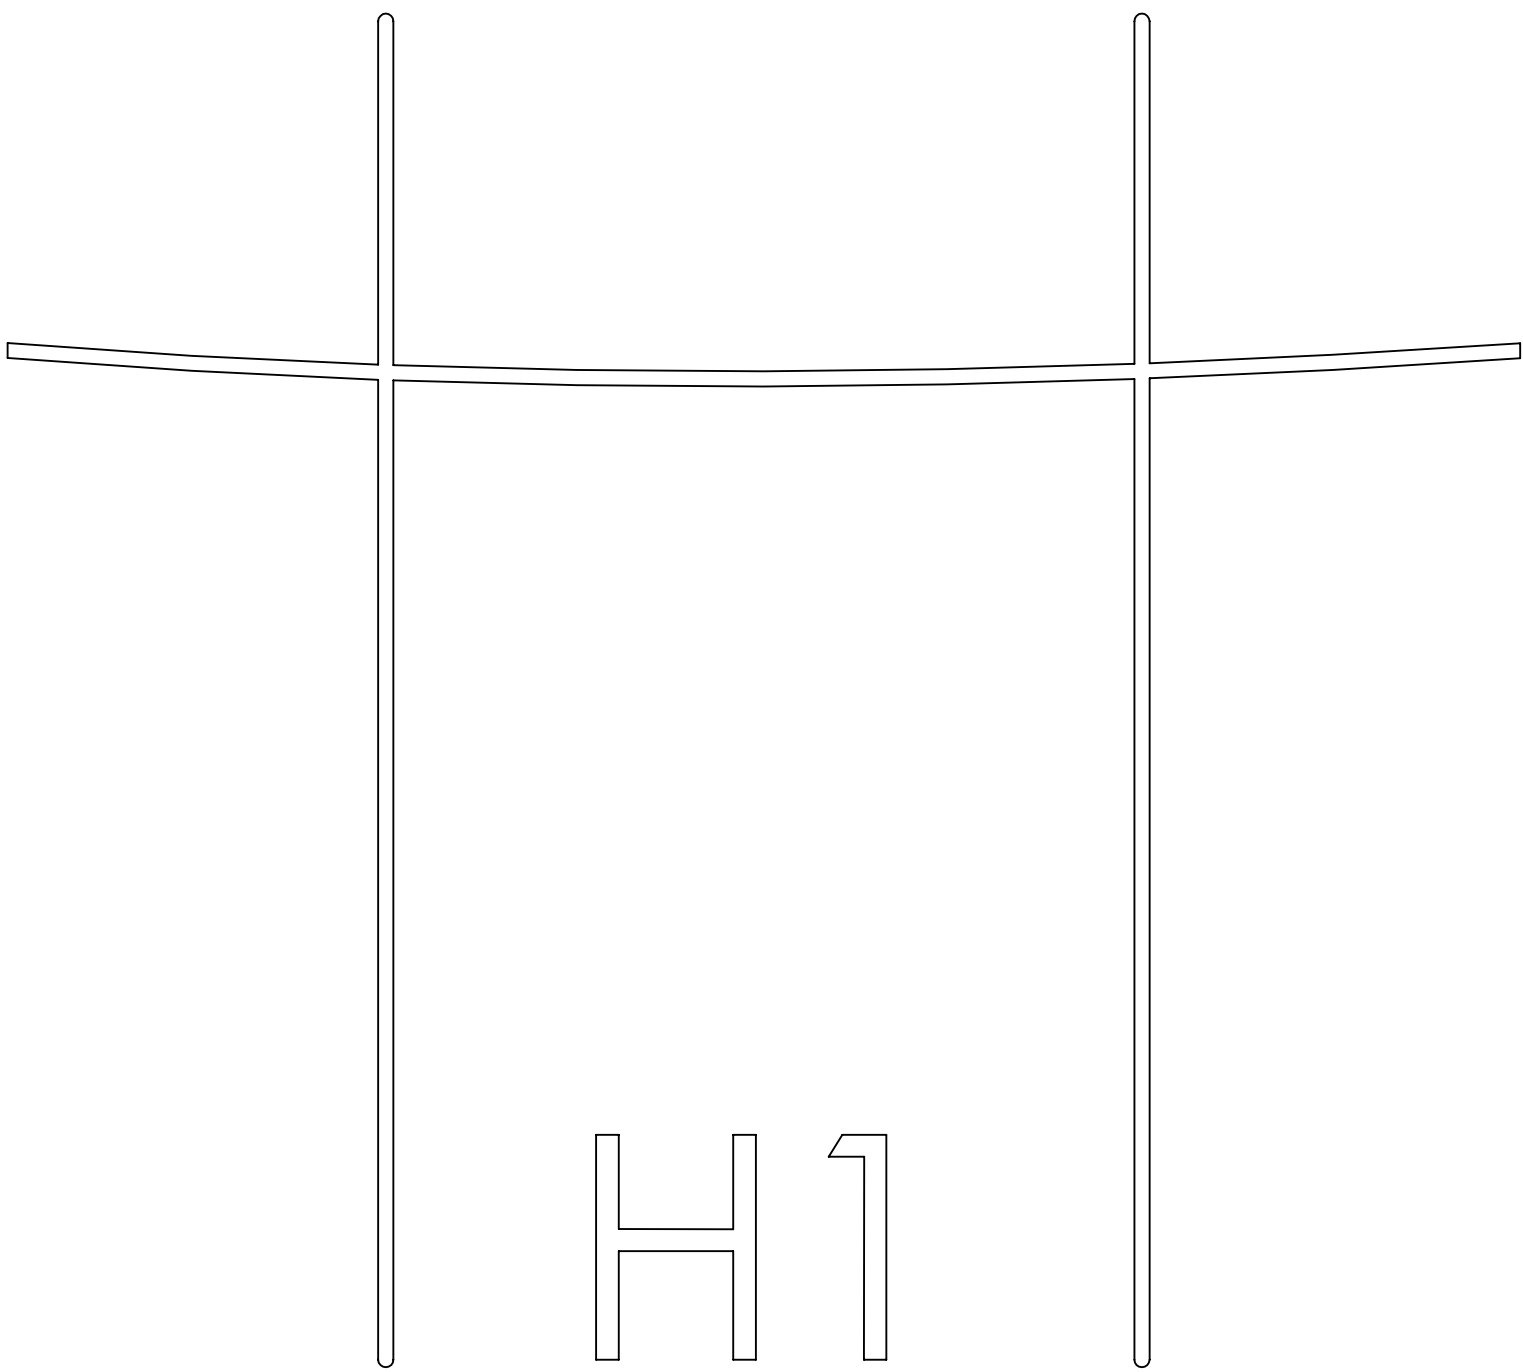

H2

→ DISCLAIMER

- Ensure the proper and adequate hardware is used to secure furniture
- Ensure fixings are appropriate for the anchoring material
- Use fixings of an appropriate strength and consider using security fixings in challenging environments
- Consider using high strength thread-locker on fixings in challenging environments
- Ensure all gaps are sealed with the appropriate anti-pick mastic after product installation if necessary
- Please read all instructions carefully to ensure proper installation. Failure to read and follow instructions may result in inadequate product installation and void of warranty
- Pineapple shall not be held liable for any consequences caused by the improper installation of products to the installer or the end user