



# HUSH ACOUSTIC PANELS → WALL FIXING

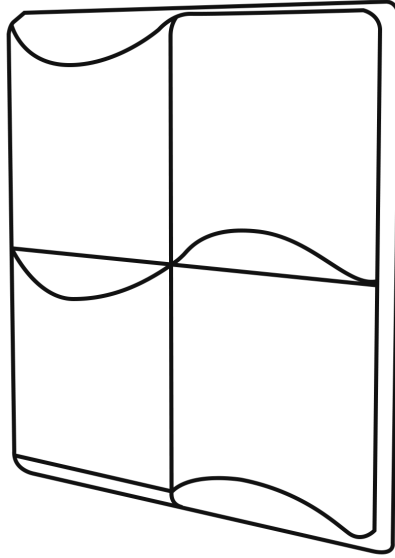

## REQUIRED ITEMS

- Long straight edge
- Spirit level
- Evo-Stik “Sticks Like” adhesive
- Applicator/caulking gun
- Tile spacer (supplied)





+44 (0)1622 237830


sales@pineapplecontracts.com


**Pineapple**

# HUSH ACOUSTIC PANELS → WALL FIXING
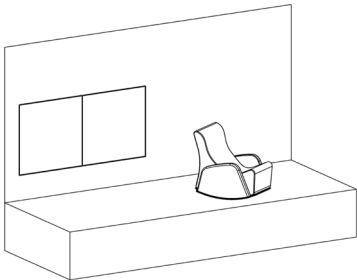
<b>01</b>	Measure out the space needed to be covered (depending on number of tiles). Mark out the area and add a centreline using tape.		

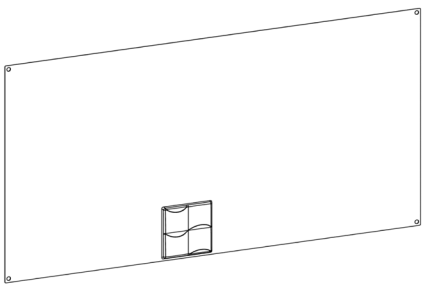	For a non-permanent fixing of HUSH consider using a backing panel such as plasterboard.	<b>02</b>
--	---	-----------



<b>03</b>	Prepare the adhesive by following the instructions on the tube and insert into the cartridge gun	
-----------	--	---

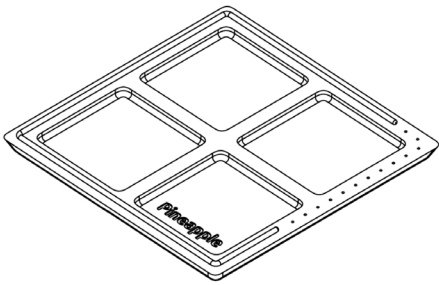	Apply a thin bead (approx. Ø4mm) of adhesive to the back edges of the panel along the centre of the face	<b>04</b>
---	--	-----------

# HUSH ACOUSTIC PANELS → WALL FIXING

05

Fix the panel to the wall using the centreline as a guide. Ensure the panel is firmly stuck on all four edges


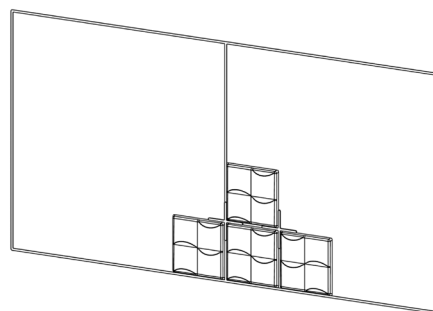


Using the spacer tool if necessary, build up the desired pattern

06

07

Use a spirit or laser level to ensure the panels remain aligned

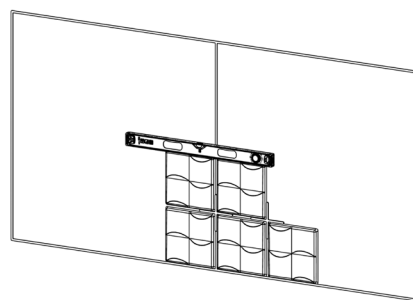

The panel's position can be adjusted for up to 15 minutes. Wipe off any excess adhesive with a cloth or white spirit.

Leave to cure for 24 hours.

08

T  
E

+44 (0)1622 237830

sales@pineapplecontracts.com

**Pineapple**

# DISCLAIMER

	<ul style="list-style-type: none"><li>→ Please read all instructions carefully to ensure proper installation. Failure to read and follow instructions may result in inadequate product installation and void of warranty</li><li>→ Pineapple shall not be held liable for any consequences caused by the improper installation of products to the installer or the end user</li></ul>



+44 (0)1622 237830

[sales@pineapplecontracts.com](mailto:sales@pineapplecontracts.com)

**Pineapple**